

PALLET TRUCK WITH HAND BRAKE

- Top class range of pallet trucks with excellent designs
- Reliable, sturdy, torsion-resistant due to its extremely strong high quality steel profile
Germany standard WAGNER painting system ensures best powder coating and painting quality.
- All pivots points are greased ensures excellent maneuverability with effortless steering.
The chromed bearing bushes and joints ensure quiet running properties and particularly long service life.



Hand pallet truck 1KG=2.2LB 1INCH=25.4MM					
Item\Type		AC20HB		AC25HB	
Capacity Q	kg	2000		2500	
Min. fork height h	mm	85	75	85	75
Max. fork height h	mm	200	190	200	190
Steering wheel	mm	Ø 200x50	Ø 180x50	Ø 200x50	Ø 180x50
Load roller Single	mm	Ø 80x93	Ø 74x93	Ø 80x93	Ø 74x93
Load roller Tandem	mm	Ø 80x70	Ø 74x70	Ø 80x70	Ø 74x70
Size of fork e's	mm	160x50			
Width overall forks B	mm	450/520/540/685			
Fork length l	mm	800/900/1000/1100/1150/1220			

Conforms to EN 1757-2



REEL CARRYING PALLET TRUCK


Roll Pallet Truck		1KG=2.2LB 1INCH=25.4MM			
Item\Type		AC20R500	AC20R700	AC20R1000	AC20R1500
Capacity Q	kg	2000			
Reel diameter	mm	400-600	600-800	800-1200	1200-1600
Width overall forks B	mm	760	850	1000	1150
Steering wheel	mm	Ø 200x50			
Load roller Single	mm	Ø 80x93			
Load roller Tandem	mm	Ø 80x70			
Fork length l	mm	800/900/1000/1100/1150/1220			

Conforms to EN 1757-2

"Reel Carrying Truck" designed for carrying horizontal transport loads such as rolls, reels, cable drums etc.



Excellent galvanized whole casting hydraulic pump, robust and durable, with fine control of lowering speed and overload valve, low routine maintenance.

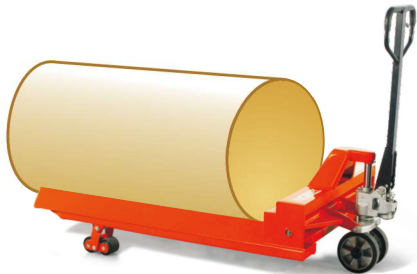

- Ergonomically designed handle with comfortable rubber grip allows the optimized safety as well as comfortable.
Three position operational handle lever for lifting, transporting and lowering purposes.
- Lower Position—to lower load, pull up on the finger tip control
- Neutral Position—to place finger tip control in this position during pulling the truck or load
- Lift Position—to raise load, push down on finger tip control, pump handle to raise the load

Hand Pallet Truck


LOW PROFILE PALETT TRUCK



Low-profile Pallet Truck(51MM/35MM) 1KG=2.2LB 1INCH=25.4MM			
Item/Type		AC-Low-51mm	AC-Supper Low
Capacity Q	kg	1500	1000
Min. fork height h	mm	51	35
Max. fork height h _i	mm	165	90
Steering wheel	mm	Ø180x50	Ø160x50
Load roller Single	mm	Ø50x93	
Load roller Tandem	mm	Ø50x70	Ø34x58
Size of fork e's	mm	160x37	160x30
Width overall forks B	mm	540/685/838	530/685
Fork length l	mm	1150/1220	1120

Conforms to EN 1757-2

- Easy access to the lowest pallets and containers with the minimum floor clearance of 35mm and 51mm only.
- Your handy choice to handle the low pallets which can only be handled by counterbalanced forklifts.

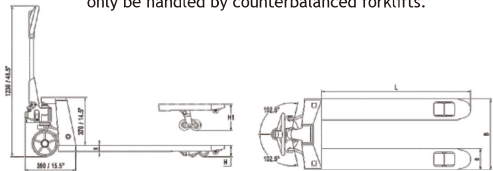


FOUR-WAY PALETT TRUCK

- Unique 4-directional hand pallet truck
- Special 4-directional movement capability provides the flexibility to maneuver wide loads through standard aisles.
- The additional set of wheels allows pallet truck to be moved sideways in addition to the conventional forward and back directions.
- With all the features and quality of our AC model standard hand pallet truck

SideRoller Pallet Truck 1KG=2.2LB 1INCH=25.4MM			
Capacity Q	kg	1500	
Min. fork height h	mm	85	
Max. fork height h _i	mm	85-170-210	
Steering wheel	mm	Ø200x50	
Load roller Single	mm	Ø78x70	
Load roller Tandem	mm	Ø65x60	
Size of fork e's	mm	160x50	
Width overall forks B	mm	540	685
Fork length l	mm	1100/1150/1220	
Remarks Normal transportation	mm	85mm-170mm,2500kg	
Remarks Transverse transportation	mm	170mm-210mm,1500kg	

Conforms to EN 1757-2



Hand Pallet Truck