


MANUAL HYDRAULIC STACKERS – FIXED BASE LEGS

Specially designed straddle leg counter weight base allows the stacker to enter special size cargos where base legs could interfere, and at the same time improve the stability.

- We can offer additional protection for the operator through foot protection on the steering rollers.
- Safe parking in any situation with mechanical parking brake.
- Optional tiller pumping lifting and foot pedal lifting.

Hand Stacker		1KG=2.2LB 1INCH=25.4MM	
Model		SFH10-W1.0M	SFH10-W1.2M
Capacity	kg	1000	1000
Load centre distance	mm	500	500
Width of leg	mm	1000	1200
Min. fork height	mm	85	85
Max. fork height	mm	1600	1600
Min. mast height	mm	1980	1980
Size of fork	mm	150 / 160X60	150 / 160X60
Length of fork	mm	900 / 1150	900 / 1150
Width of overall forks	mm	330-740 / 550	330-740 / 550
Overall length (adjust/fixed)	mm	1480 / 1680	1480 / 1680
Radius of gyration	mm	1250 / 1380	1250 / 1380
Wheel base	mm	1215	1215
Track width, front	mm	648	648
Height of handle min./max.	mm	750 / 1170	750 / 1170
Fork rollers	mm	Ø 150X50	Ø 150X50
Big wheel	mm	Ø 180X50	Ø 180X50
Weight	kg	252	262

Conforms to EN1757-1

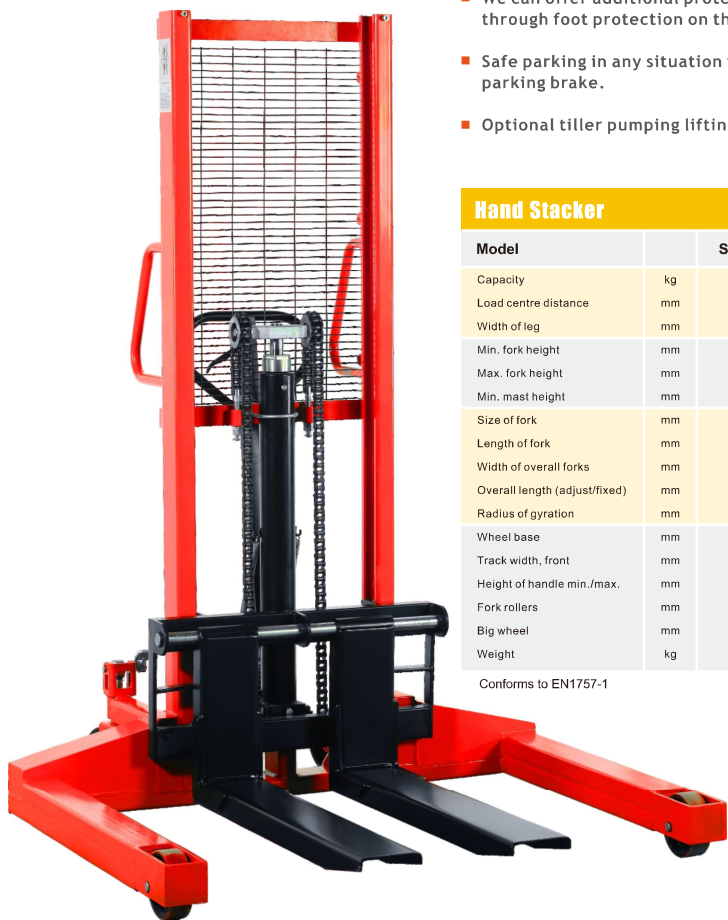

MANUAL HYDRAULIC STACKERS – ADJUSTABLE BASE LEGS

- For lifting loads, skids, racks, and objects. Forks adjust from side to side to accommodate skid widths.
- Feature fold-away hydraulic foot pump for raising loads.

1KG=2.2LB 1INCH=25.4MM

Manual Hydraulic Stackers--Adjustable Base Legs				
Model		SFH1016AG	SFH1025AG	SFH1030AG
Capacity	kg	1000	1000	1000
Lifting Height Max.	mm	1600	2500	3000
Lifting Height Min.	mm	70	70	70
Fork Length	mm	915	915	915
Fork Width	mm	100	100	100
Outer width of forks	mm	220-850	220-850	220-850
Base Legs I.D.	mm	915-1220	915-1220	915-1220
Base Legs O.D.	mm	1100-1370	1100-1370	1100-1370
Overall Length	mm	1420	1420	1420
Overall Width	mm	1100-1370	1100-1370	1100-1370
Overall Height	mm	2020	1770	2020
Load Center	mm	500	500	500
Rear Caster Dia.	mm	180	180	180
Front Wheel Dia.	mm	127	127	127
Rear Wheel Dia.	mm	180	180	180
Wheel Type		2 Rigid, 2 Swivel	2 Rigid, 2 Swivel	2 Rigid, 2 Swivel
Shipping Weight	kg	350	400	400

- Two-swivel and two rigid casters provide four wheel support for heavy loads.
- Include wheel lock and safety screen to ensure safety during operation.



Manual & Semi-Electric Stackers